

MEDUSA 150


GUITAR SPEAKERS



APPLICATION NOTES:

Big tight low end that is well defined. Smooth mids and high end without losing definition.

FREQUENCY RESPONSE DATA¹

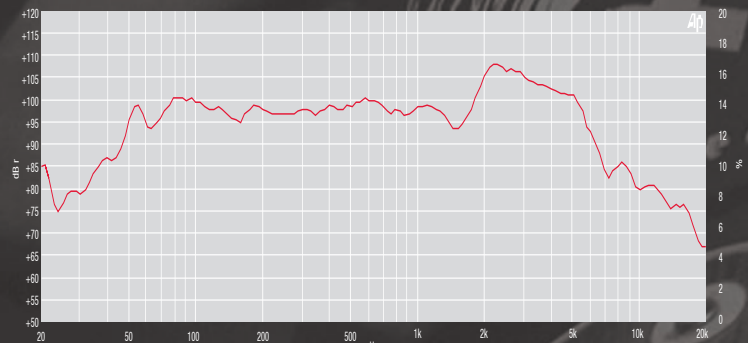

¹ Half space response measured in a 975 litre sealed box

ELECTRO ACOUSTIC SPECIFICATIONS

Nominal Chassis Diameter	12"
Impedance	4 / 8 / 16 Ω
Power Rating (AES)	150 w
Sensitivity 1w - 1m	103 dB
Chassis Type	Pressed Steel
Voice Coil Diameter	2" / 50.8mm
Coil Material	Copper
Magnet Type	Ferrite
Magnet Weight	50 oz
Usable Frequency Range	80 Hz - 6.2 kHz
Resonance FS Hz	84
RE Ohms	6.3 Ω

MOUNTING / SHIPPING INFORMATION


Overall Diameter	12.20" / 310 mm
Overall Height	5.11" / 130mm
Magnet Diameter	6.10" / 155mm
Baffle Hole F/M	11.25" / 286 mm
Mounting Hole Qty and Diameter	8 x 7.0 mm
Mounting Hole P.C.D.	11.75" / 298 mm
Nett Weight	9.02 lb / 4.15 kg
Shipping Weight	10.8 lb / 4.8 kg
Packing Carton Dimensions	340 x 340 x 222 mm

MEDUSA 150C

APPLICATION NOTES:

Cast Chassis. Smooth low end, smooth mid range, good high end response. Great for combos, 1&2 x 12 and Lead Guitar.

FREQUENCY RESPONSE DATA¹

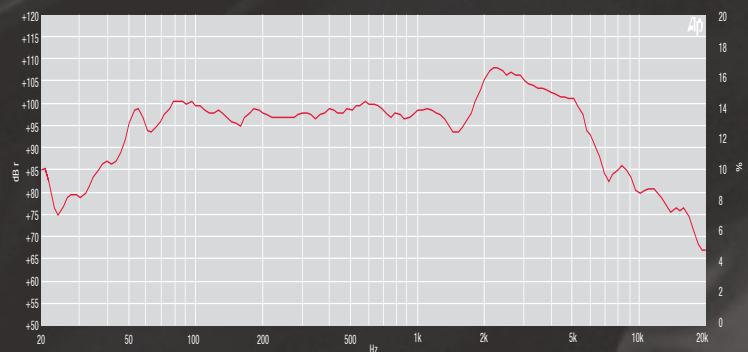

¹ Half space response measured in a 975 litre sealed box

ELECTRO ACOUSTIC SPECIFICATIONS

Nominal Chassis Diameter	12"
Impedance	4 / 8 / 16 Ω
Power Rating (AES)	150 w
Sensitivity 1w - 1m	103 dB
Chassis Type	Cast Aluminium
Voice Coil Diameter	2" / 50.8mm
Coil Material	Copper
Magnet Type	Ferrite
Magnet Weight	50 oz
Usable Frequency Range	80 Hz - 6.2 kHz
Resonance FS Hz	84
RE Ohms	6.3 Ω

MOUNTING / SHIPPING INFORMATION

Overall Diameter	13" / 330 mm
Overall Height	5.39" / 137 mm
Magnet Diameter	6.10" / 155mm
Baffle Hole F/M	11.03" / 281 mm
Mounting Hole Qty and Diameter	4 x 5.5 mm
Mounting Hole P.C.D.	12.5" / 317.5mm
Nett Weight	9.4lb / 4.25kg
Shipping Weight	11lb / 5.0kg
Packing Carton Dimensions	340 x 340 x 222 mm

FANE